



XB Series Self-Service Kiosk

21.5/23.8/27/32" touch screen | Wall Mount | Freestanding

XB Series self-service kiosk designed for retail and restaurant applications. Available in 21.5", 23.8", 27", and 32" sizes with 10-point capacitive touch screen, supporting wall-mounted and floor-standing installation.

The side-opening cabinet design ensures easy maintenance, optional receipt printer, QR scanner, card reader, camera, and POS bracket enable flexible customization. Supports LAN, WiFi, optional 4G, and Android, Windows, or Linux operating systems.



Android/Windows



Camera



QR Code



58mm/80mm
Printer



Card Reader



Side-opening
Maintenance



Solid Metal Enclosure

Side-opening design, easy to maintenance



58/80mm Thermal Printer
with Auto Cutter
Fast and clear receipt printing

Multiple Payment Methods
NFC, QR Code, Payment Terminal

Flexible Installation Options


Wall-Mounting Bracket



Floor-Stand



Floor Stand with Check-Out Desk

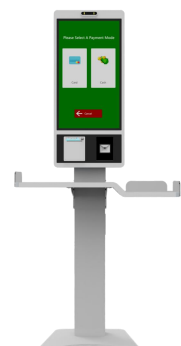

XB Series

Self-Service Kiosk


Applications



Restaurant



Retail

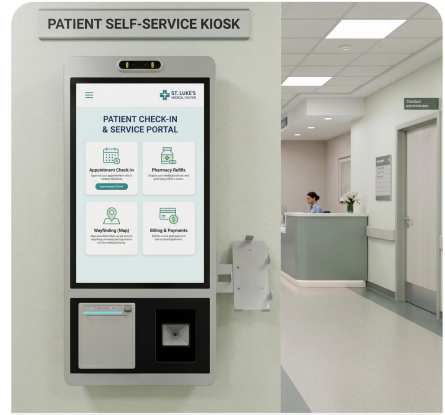

Medical Facility

Specification

OS	Android	Windows
Version	Android 11	Windows 10/11 or Linux
Processor	Android: RK3576	X86: Intel Celeron/Core i3/i5
Memory	4GB RAM, 16GB ROM ※4GB RAM, 32GB ROM	4GB RAM, 128GB ROM ※8GB RAM, 256GB ROM
Display	21.5/23.8/27/32inch FHD	21.5/23.8/27/32inch FHD
Touch	10 points PCAP touch	10 points PCAP touch
Thermal Printer	Paper width: 58/80mm, 58/80mm, with auto cutter	Paper width: 58/80mm, 58/80mm, with auto cutter
Scanner	1D/2D Barcode	1D/2D Barcode
※Camera	Single-lens Camera Face Recognition: Dual-lens Camera	Single-lens Camera Face Recognition: Dual-lens Camera
※Card Reader	ISO14443 Type A/B, Mifare	ISO14443 Type A/B, Mifare
Network	Wi-Fi/Bluetooth/Ethernet ※4G	Wi-Fi/Bluetooth/Ethernet ※4G
Audio	Digital Audio Speaker	Digital Audio Speaker
Peripheral Ports	USB-A, RJ45, Power port	USB-A, RJ45, Power port
Power Supply	100-240V AC, 50Hz	100-240V AC, 50Hz
Software	Ordering Software Available	Ordering Software Available
Environmental	Operating temperature: 0°C~ 45°C Storage temperature: -25°C~ 60°C	Operating temperature: 0°C~ 45°C Storage temperature: -25°C~ 60°C

※Optional

Datasheet may be revised or amended by product specs.

Product Dimension

